




# RollerPro™

## PORTABLE SPRINKLER BASE

The 22" wide stainless steel roller of RollerPro™ provides a stable field position for supplemental watering. Designed for years of hard use, it is ideal for watering dry spots and newly seeded areas.

### features

- 22" wide stainless steel roller is weighted to prevent movement during use
- ¾" inlet and outlet adapters included
- Standard 1" FHT inlet x 1" female NPT outlet

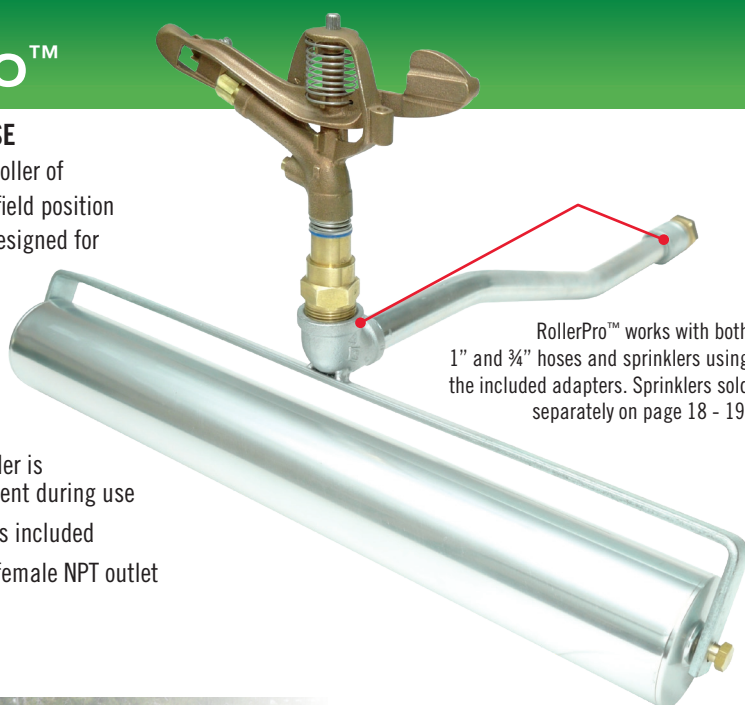

RollerPro™ works with both 1" and ¾" hoses and sprinklers using the included adapters. Sprinklers sold separately on page 18 - 19.



# SpotShot™

## LOW VOLUME PORTABLE SPRINKLER KIT

SpotShot™ is an expandable sprinkler system kit ideal for turf areas requiring low volume watering for extended periods. Connect the Starter Kit to a quick coupler (or golf sprinkler with the HoseTap™ on page 9) and connect Add-On Kits for larger area needs.



**Starter Kit** includes 20' of ½" flexible PVC tubing with connection fittings, pressure regulator, sprinkler base and low volume rotating sprinkler (20 ft. radius / 0.65 GPM - 0.16 in./hr.)

**Add-On Kit** includes 20' of ½" flexible PVC tubing with connection fittings, sprinkler base and low volume rotating sprinkler (20 ft. radius / 0.65 GPM - 0.16 in./hr.)

### Micro-Sprinkler Options

- 20 ft. radius / 0.65 GPM (0.16 in./hr.)
- 20 ft. radius / 1.2 GPM - (0.26 in./hr.)

### ideal for

- Leaching salts on greens
- Targeting hot spots on fairways, roughs, etc.
- Mound watering
- New seed grown in
- Other low volume watering

### ordering

Part # A-RP221	RollerPro™
Part # SS-SK	SpotShot™ Starter Kit (20 ft. rad, 0.65 GPM)
Part # SS-AOK	SpotShot™ Add-on Kit (20 ft. rad, 0.65 GPM)
Part # SS-SK26	SpotShot™ Starter Kit (20 ft. rad, 1.2 GPM)
Part # SS-AOK26	SpotShot™ Add-on Kit (20 ft. rad, 1.2 GPM)
Part # SS-SB	SpotShot™ Sprinkler Base

Part # R75-HFM-40	Pressure Regulator (40 psi)
Part # TP-050-20	20' Coil of ½" PVC, SuperFlex Pipe
Part # S40-050-HFS	¾" Hose Thread Female x Male, Slip Fitting
Part # S40-050-HMS	¾" Hose Thread Male x Female, Slip Fitting
Part # SS-S16	Micro-sprinkler (20 ft. rad, 0.65 GPM - 0.16 in/hr)
Part # SS-S26	Micro-sprinkler (20 ft. rad, 1.2 GPM - 0.26 in/hr)